

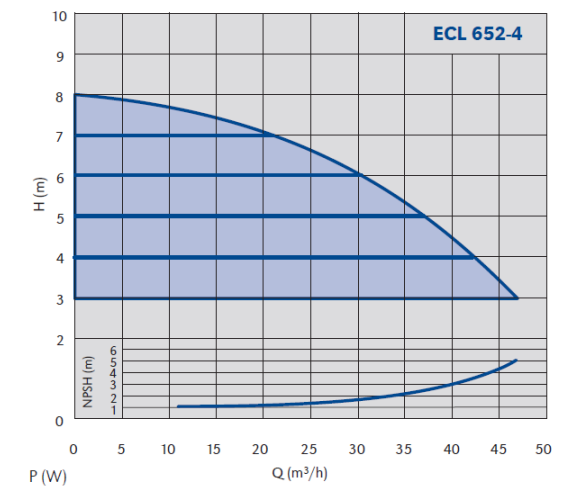
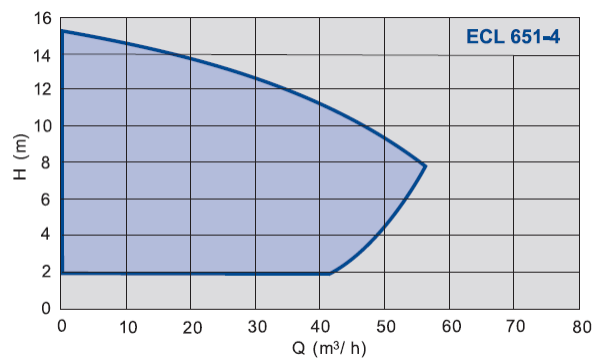
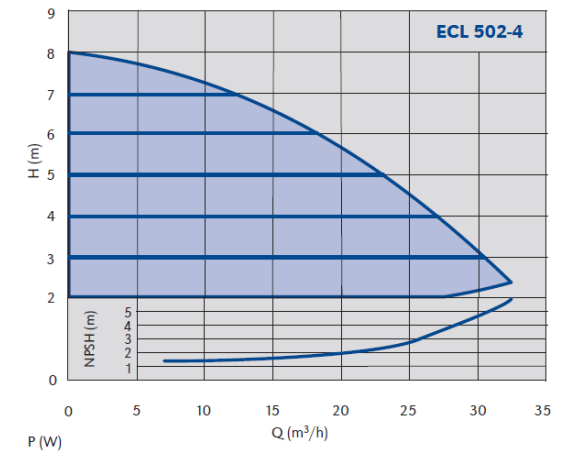
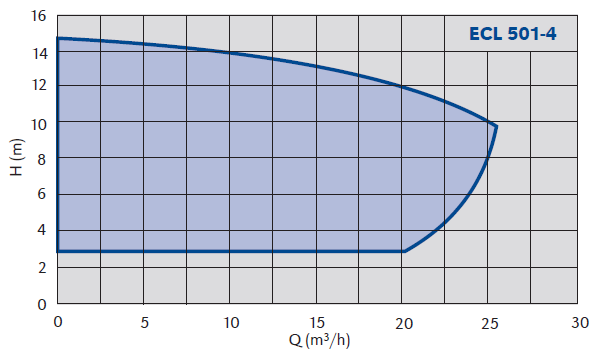
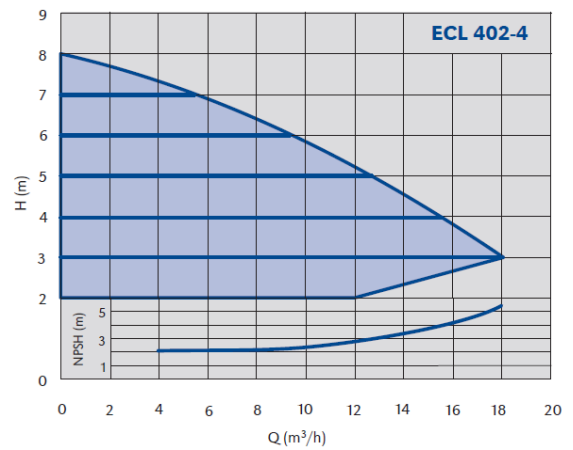
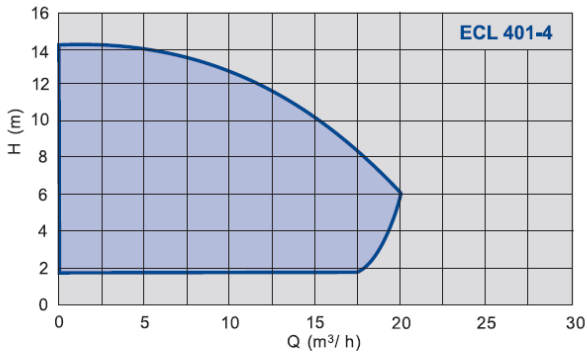

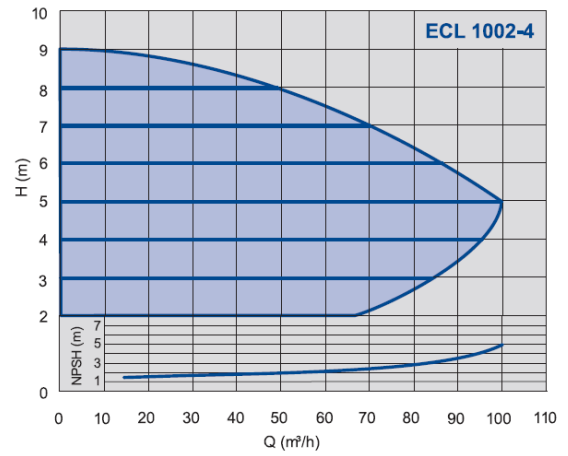
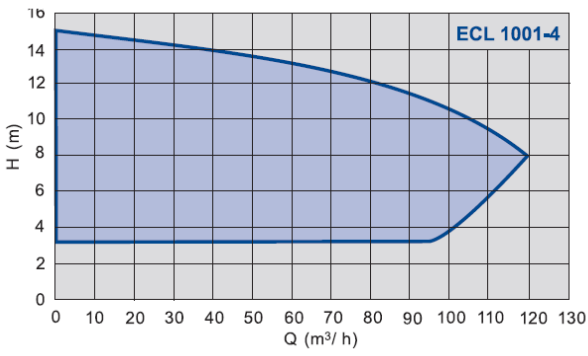


Elettropompe in linea singole con inverter separato  
 Single in-line electric pumps with separate frequency converter

**ECL 4P**

4 Poli

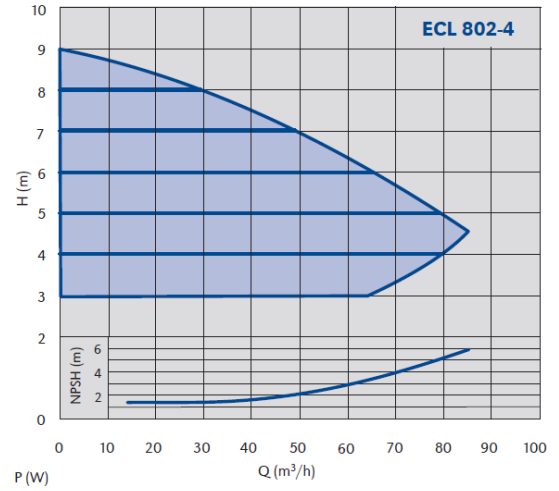


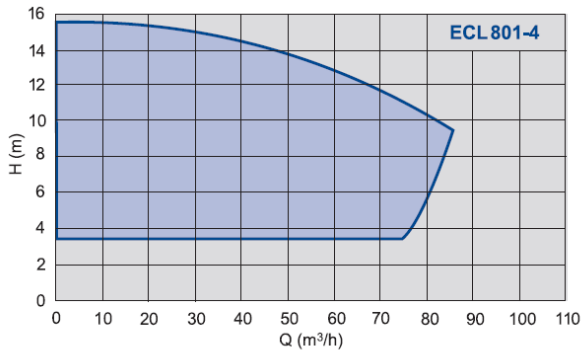





Elettropompe in linea singole con inverter separato

**ECL 2P**

Single in-line electric pumps with separate frequency converter




2 Poli

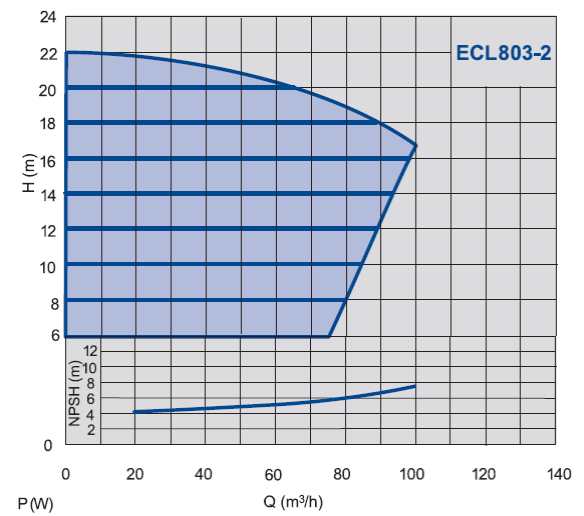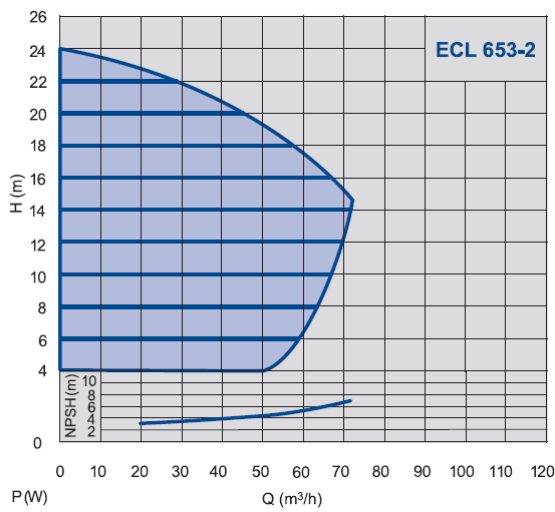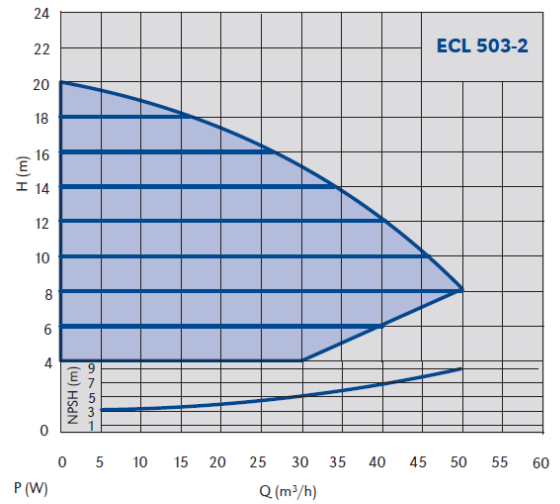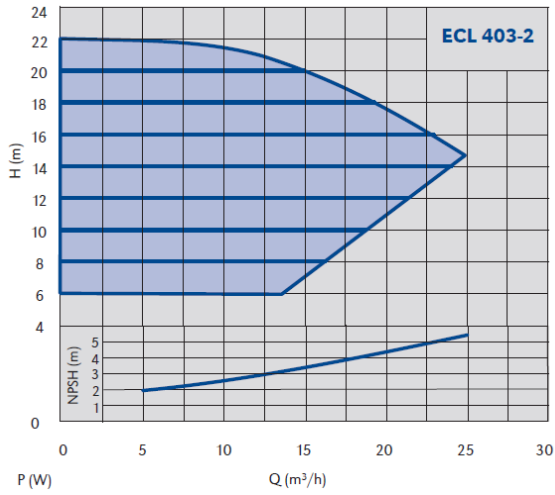

## Dati tecnici e Dimensioni

**ECL 2P-4P**

MODELLO	DN	Q: mc/h	H: m	PN	T min.	T Max	IP
ECL 401 - 4	40	20	15	16	-15°C	140	54
ECL 402 - 4	40	18	8	16	-15°C	140	54
ECL 501 - 4	50	26	15	16	-15°C	140	54
ECL 502 - 4	50	29	8	16	-15°C	140	54
ECL 651 - 4	65	56	15	16	-15°C	140	54
ECL 652 - 4	65	47	8	16	-15°C	140	54
ECL 801 - 4	80	85	15	16	-15°C	140	54
ECL 802 - 4	80	85	9	16	-15°C	140	54
ECL 1001 - 4	100	119	15	16	-15°C	140	54
ECL 1002 - 4	100	100	9,5	16	-15°C	140	54
ECL 403 - 2	40	25	22	16	-15°C	140	54
ECL 503 - 2	50	50	20	16	-15°C	140	54
ECL 653 - 2	65	72	24	16	-15°C	140	54
ECL 803 - 2	80	100	22	16	-15°C	140	54

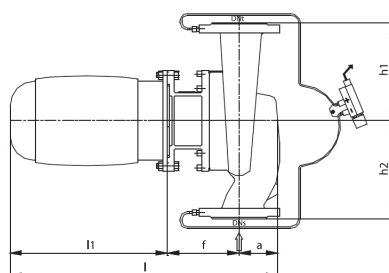

MODELLO	L (mm)	DN	a	f	l1	l	h1	h2	D1	D2	D3
ECL 401 - 4	390	40	90	155	234	479	190	200	150	110	18
ECL 402 - 4	360	40	90	155	234	479	180	180	150	110	18
ECL 501 - 4	425	50	96	159	249	504	205	220	165	125	18
ECL 502 - 4	380	50	96	159	249	504	180	200	165	125	18
ECL 651 - 4	480	65	95	164	249	508	225	255	185	145	18
ECL 652 - 4	420	65	95	164	249	508	200	220	185	145	18
ECL 801 - 4	530	80	103	168	307	578	245	285	200	160	18
ECL 802 - 4	480	80	103	168	307	578	220	260	200	160	18
ECL 1001 - 4	560	100	113	169	307	589	270	290	220	180	18
ECL 1002 - 4	520	100	113	169	307	589	245	275	220	180	18
ECL 403 - 2	340	40	90	155	314	559	160	180	150	110	18
ECL 503 - 2	340	50	96	159	314	569	160	180	165	125	18
ECL 653 - 2	390	65	95	189	361	645	180	210	185	145	18
ECL 803 - 2	440	80	103	193	357	653	200	240	200	160	18

MODELLO	Pot. (W)	In (A)	V	Classe isolamento
ECL 401 - 4	1100	2,4	3 ~ 400 V	F
ECL 402 - 4	750	1,63		
ECL 501 - 4	1500	3,26		
ECL 502 - 4	1100	2,4		
ECL 651 - 4	2200	4,64		
ECL 652 - 4	1100	2,4		
ECL 653 - 4	750	4,63		
ECL 801 - 4	3000	6,17		
ECL 802 - 4	2200	4,64		
ECL 803 - 4	1100	2,4		
ECL 1001 - 4	4000	8,11		
ECL 1002 - 4	3000	6,17		

MODELLO	Pot. (W)	In (A)	V	Classe isolamento
ECL 403 - 2	3000	5,92	3 ~ 400 V	F
ECL 503 - 2	3000	5,92		
ECL 653 - 2	5500	10,6		
ECL 803 - 2	7500	14,1		
ECL 802 - 2	18500	33,7		
ECL 801 - 2	22000	39,1		
ECL 652 - 2	7500	14,1		
ECL 651 - 2	15000	27,6		
ECL 502 - 2	5500	10,6		
ECL 402 - 2	4000	7,72		
ECL 401 - 2	5500	10,6		







Elettropompe singole in linea standard  
Single standard In-line electric pumps

**CV 2P-4P**




4 Poli

2 Poli

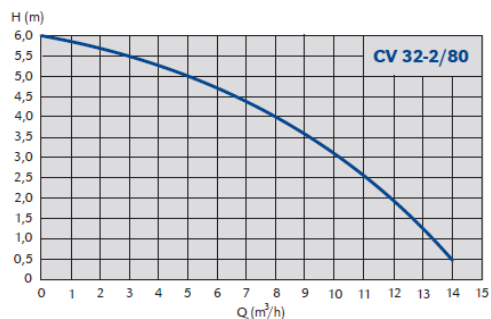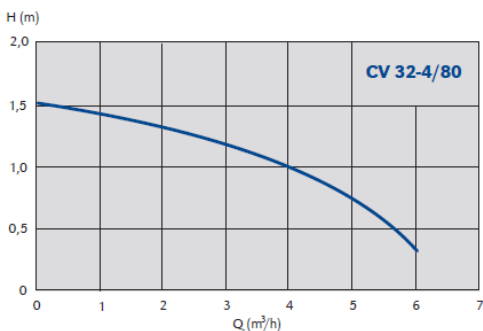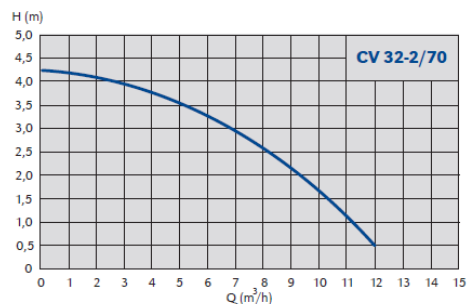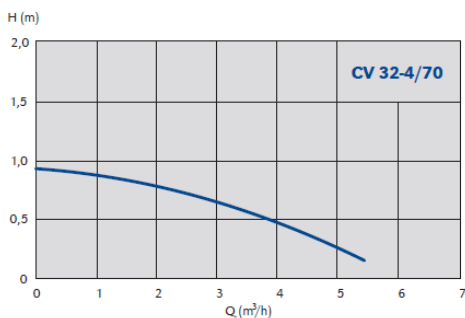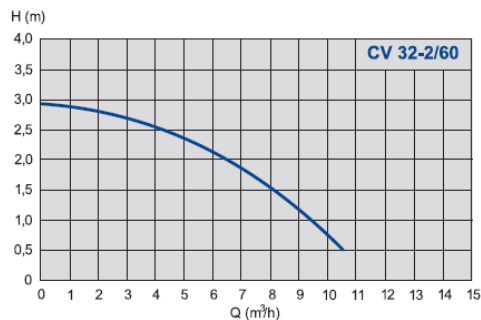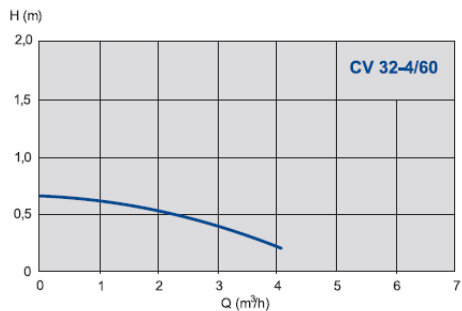

**Dati tecnici e dimensioni**

MODELLO	DN	PN	T min.	T Max	IP	rpm	Pot. (W)	In (A)	V	Classe isolamento
CV 32 - 4 / 60	32	16	-10°C	110°C	54	1340	120	0,41	3~400V	F
CV 32 - 4 / 70						1340	120	0,41		
CV 32 - 4 / 80						1340	120	0,41		
CV 32 - 2 / 60						2750	250	0,64		
CV 32 - 2 / 70						2750	250	0,64		
CV 32 - 2 / 80						2750	250	0,64		







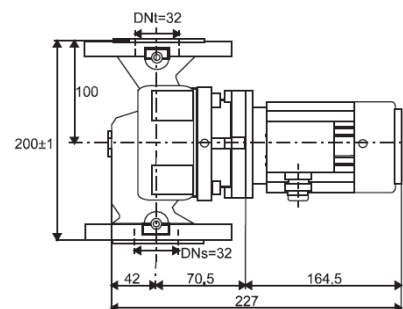


**Elettropompe singole in linea standard**  
**Single standard In-line electric pumps**

**CL 4P**



**4 Poli**






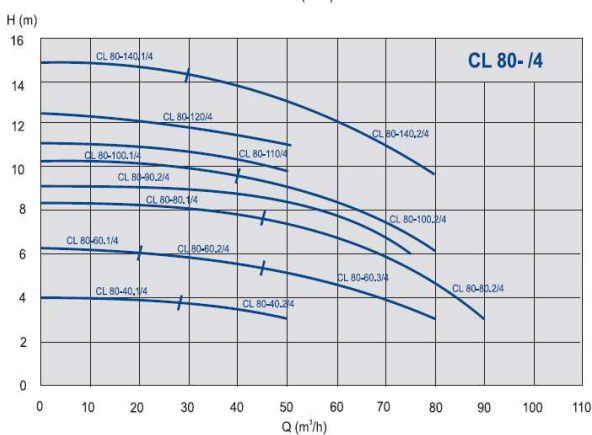
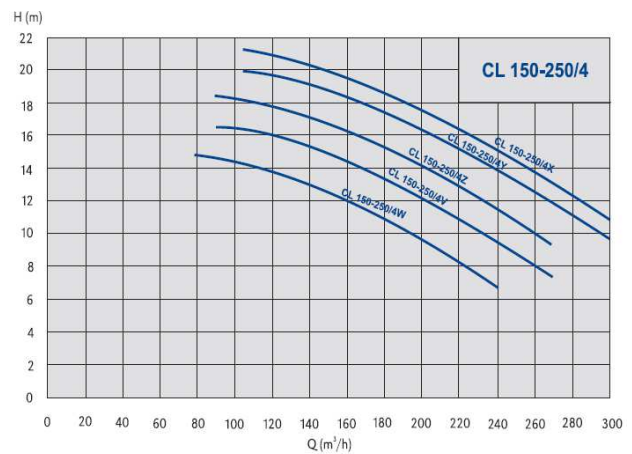
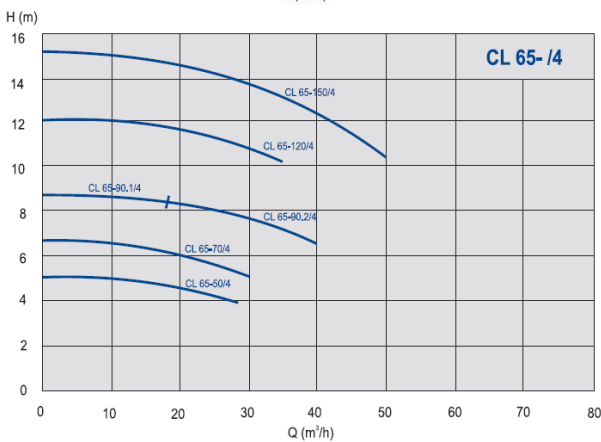
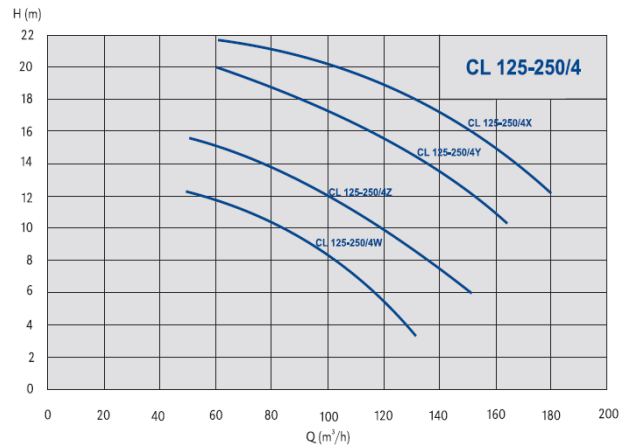
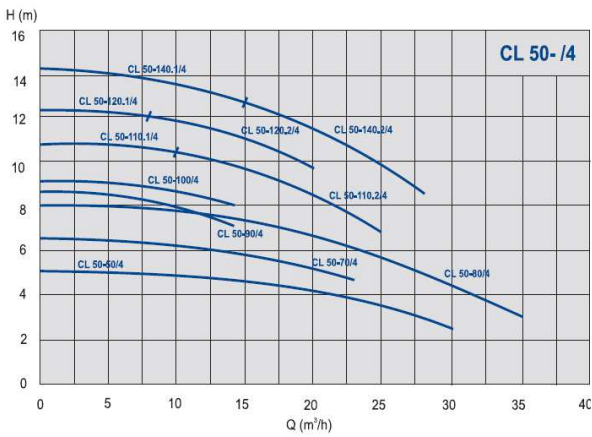
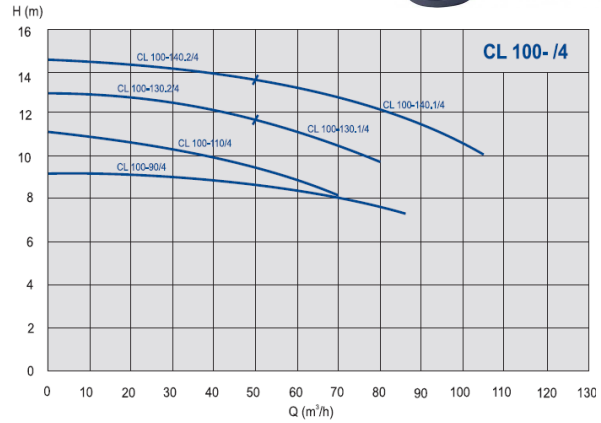
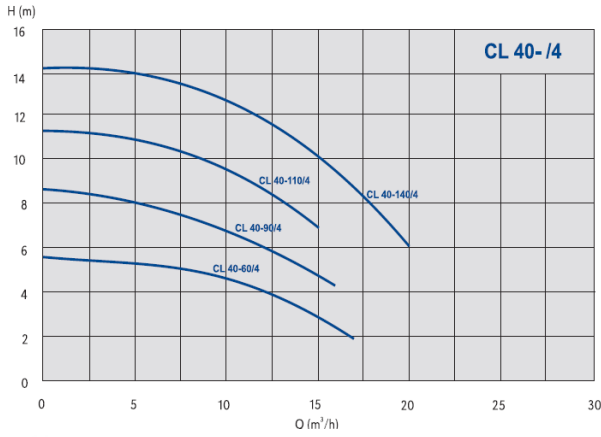


Elettropompe singole in linea standard  
Single standard In-line electric pumps

**CL 2P**



2 Poli

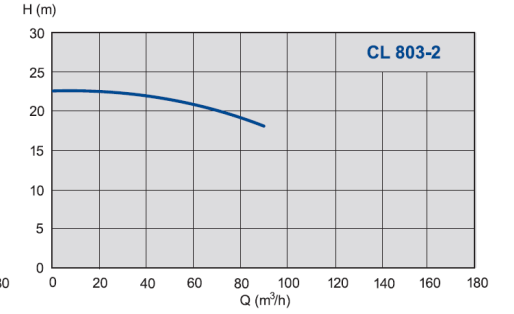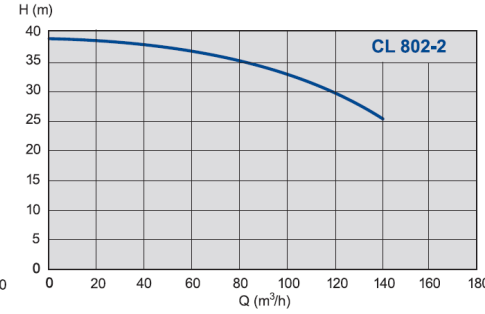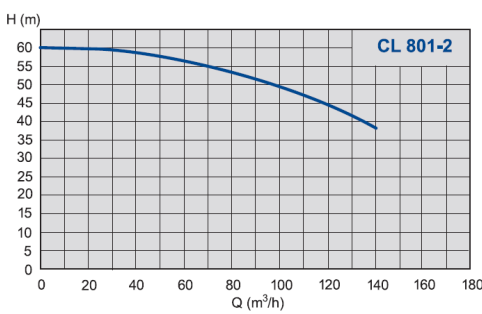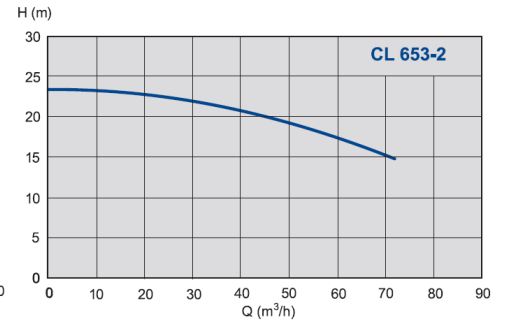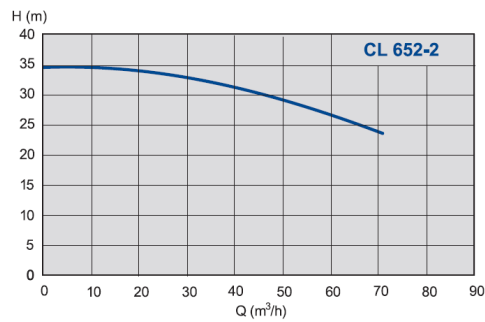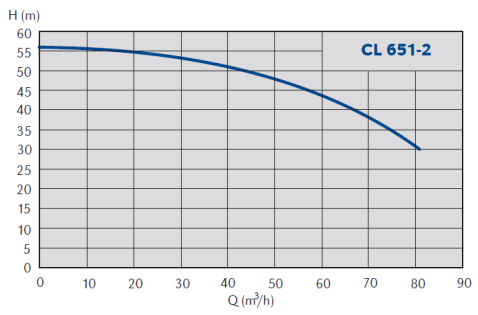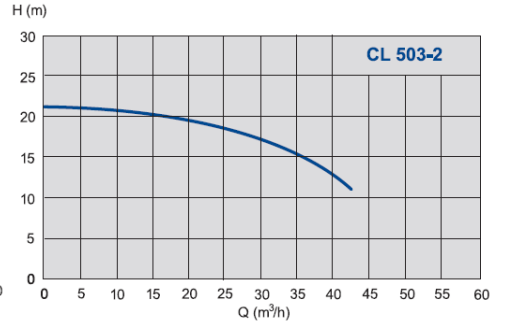
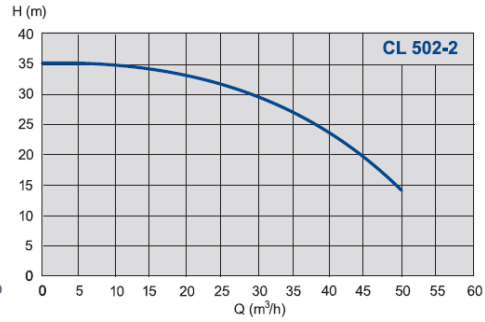
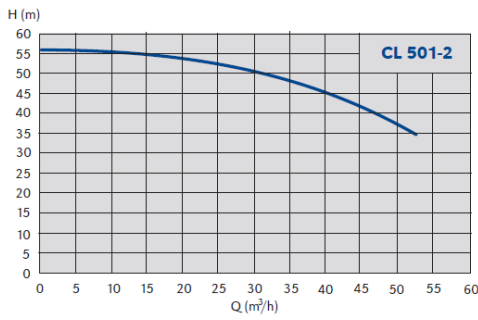
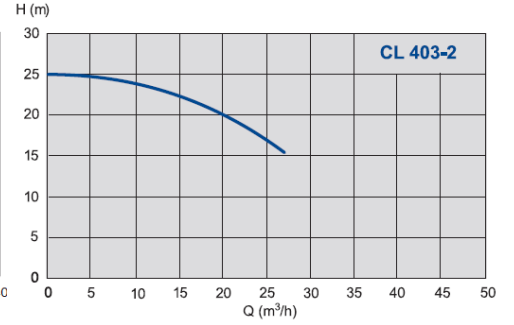
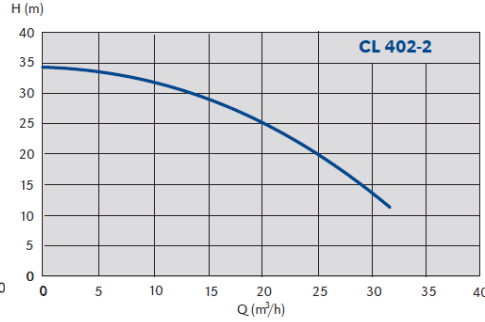
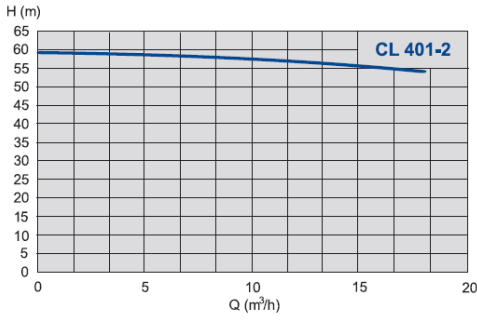


Elettropompe singole in linea standard  
Single standard In-line electric pumps







**CL 2P**







2 Poli

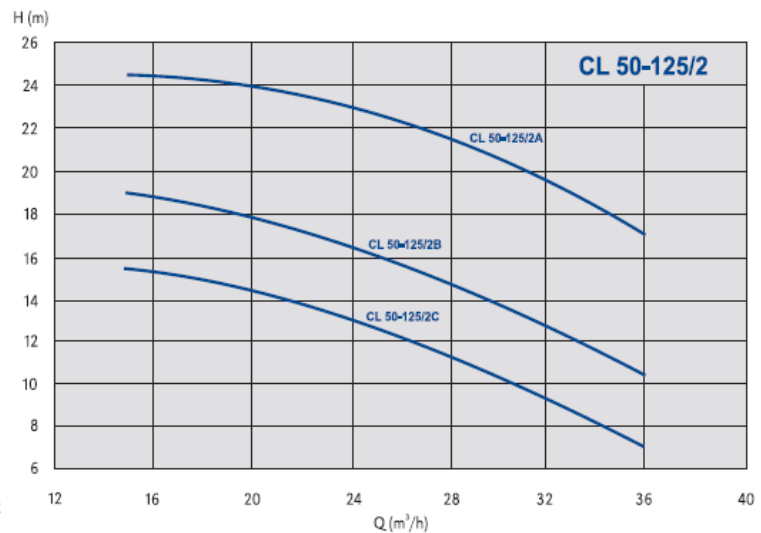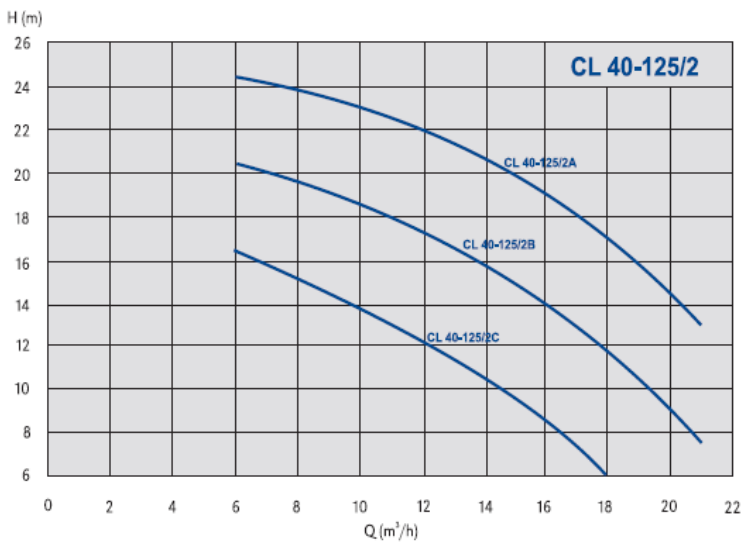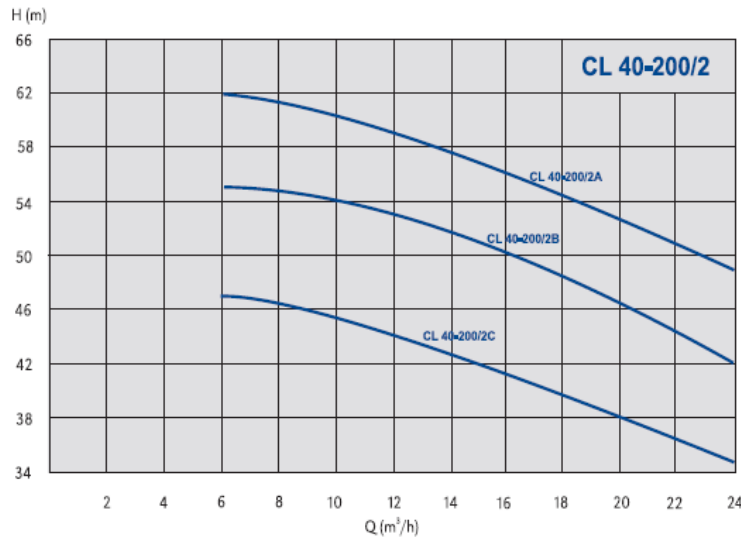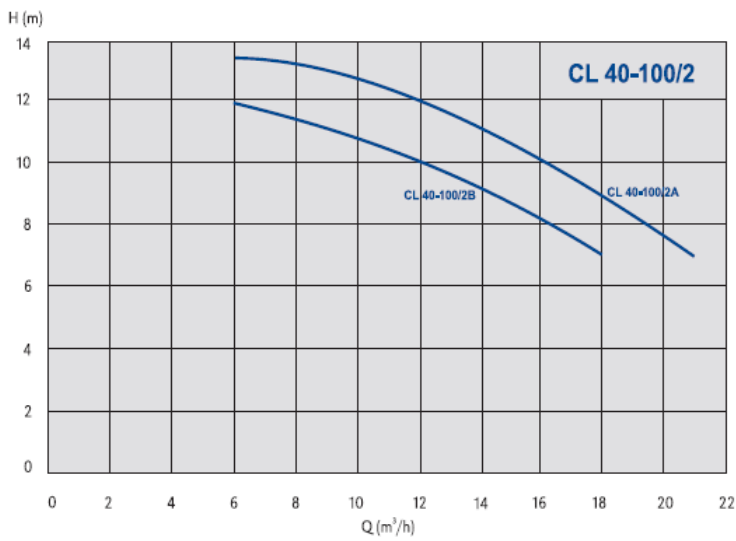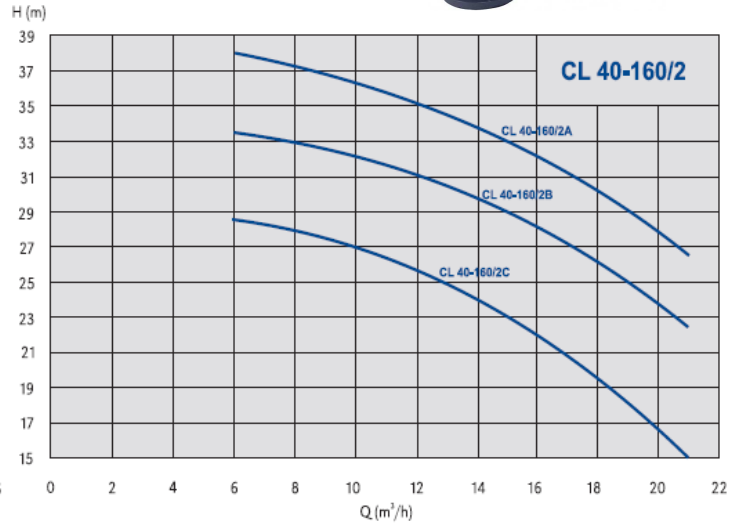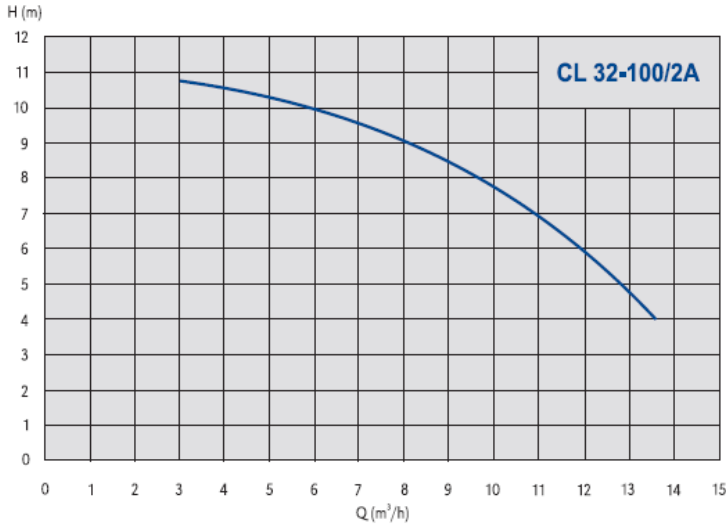



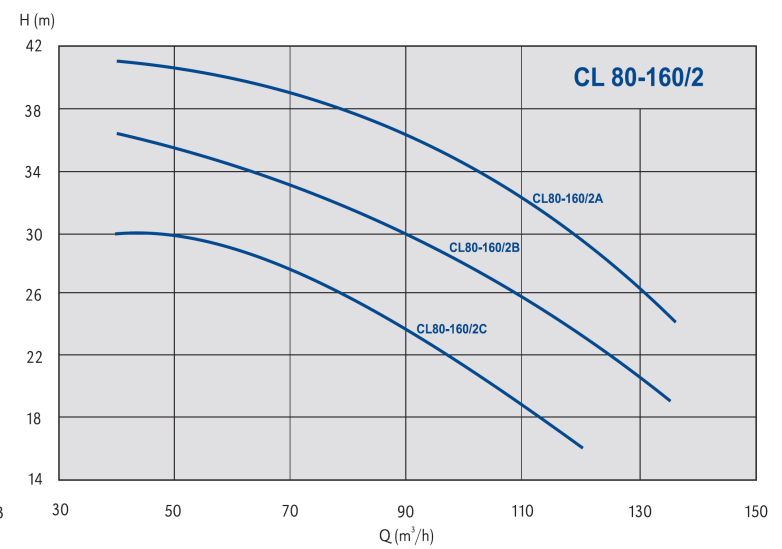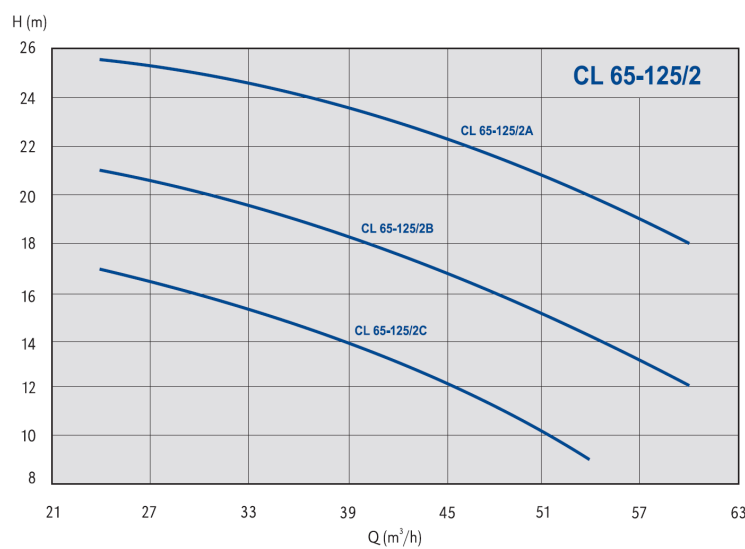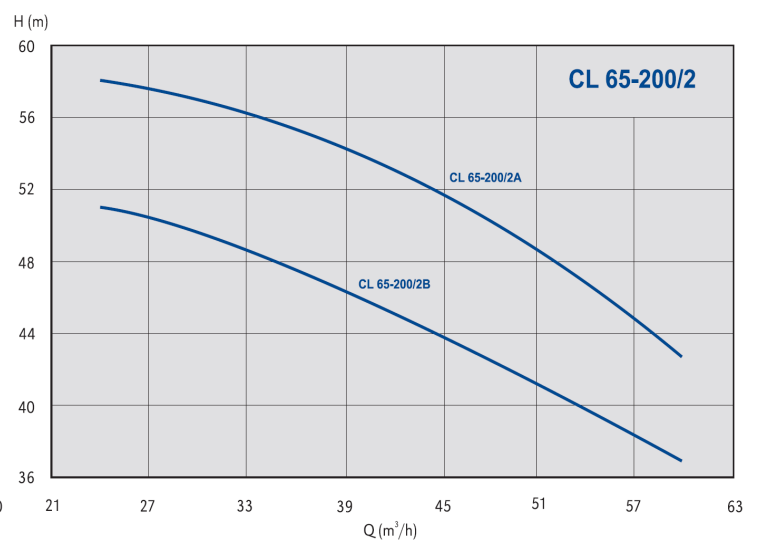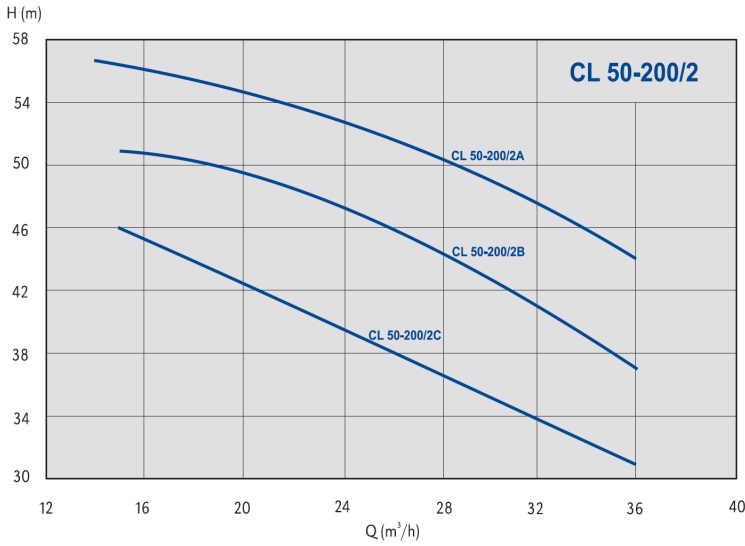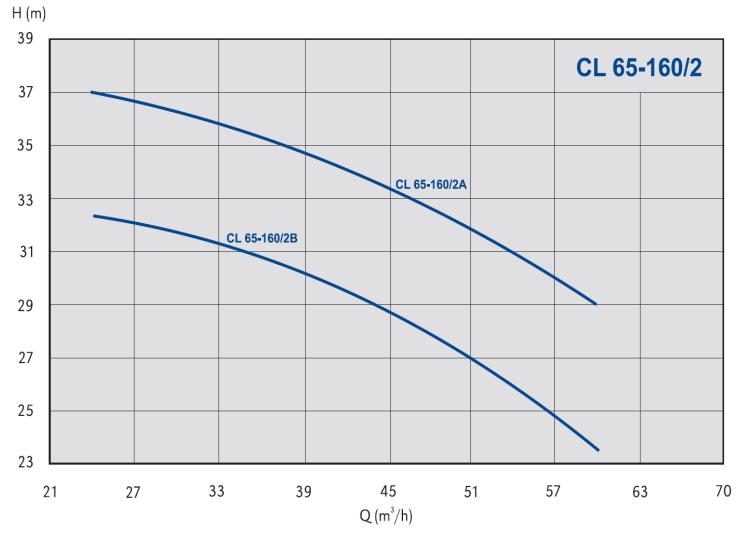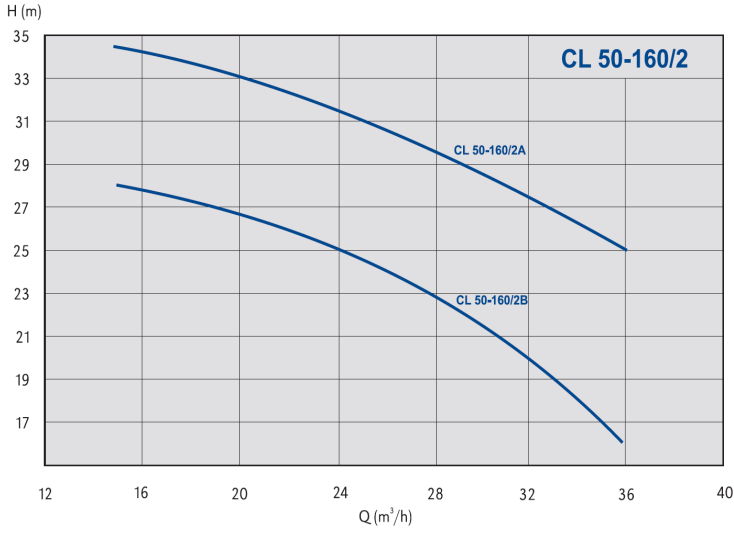

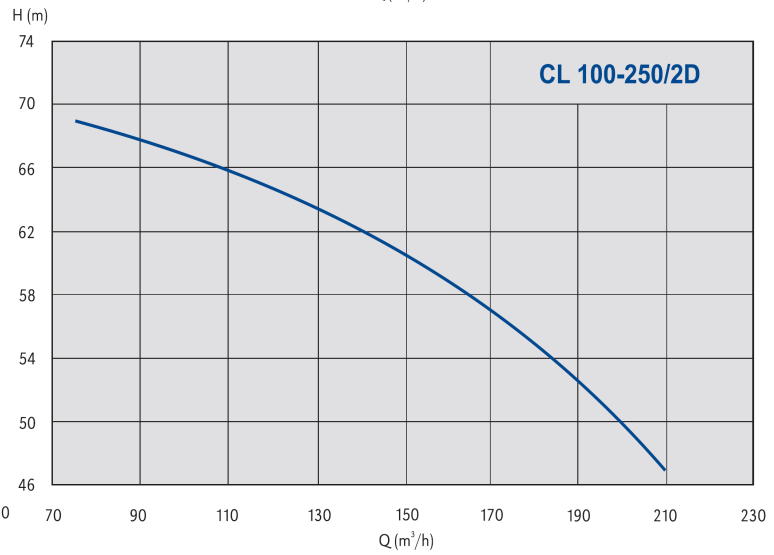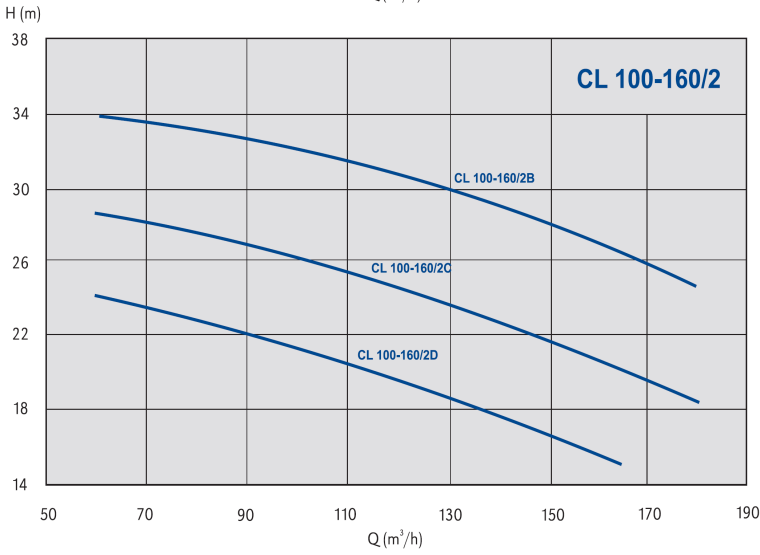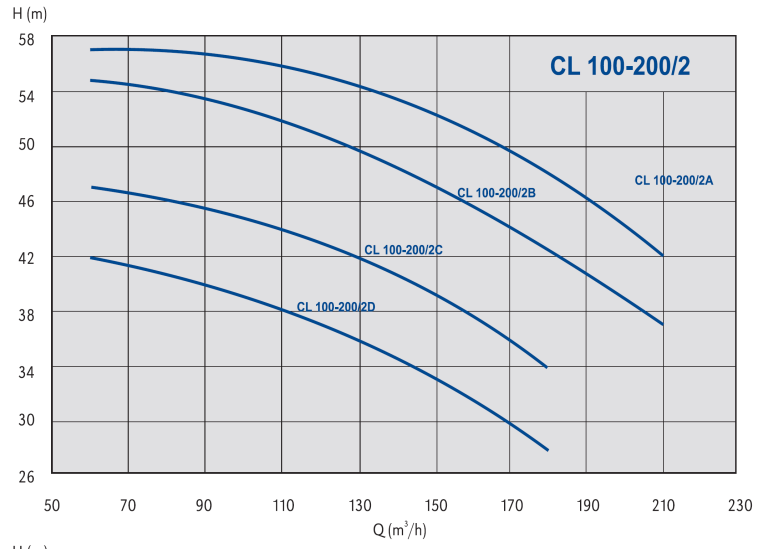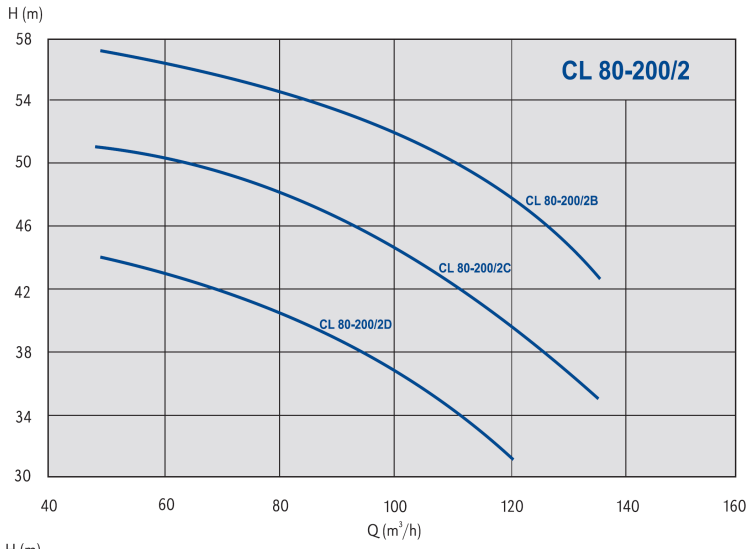

## CL 4P

### Dati Tecnici 4 Poli – 1500 rpm

MODELLO	Pot. (W)	In (A)	V	Classe isolamento	MODELLO	Pot. (W)	In (A)	V	Classe isolamento
CL 40-140/4	1100	2,4	3 ~ 400 V	F	CL 80-100.1/4	1500	3,26	3 ~ 400 V	F
CL 40-110/4	750	1,63			CL 80-100.2/4	2200	4,64		
CL 40-90/4	550	1,27			CL 80-90/4	2200	4,64		
CL 40-60/4	550	1,27			CL 80-80.1/4	1500	3,26		
CL 50-140.1/4	1100	2,4			CL 80-80.2/4	2200	4,64		
CL 50-140.2/4	1500	3,26			CL 80-60.1/4	750	1,63		
CL 50-120.1/4	750	1,63			CL 80-60.2/4	1100	2,4		
CL 50-120.2/4	1100	2,4			CL 80-60.3/4	1500	3,26		
CL 50-110.1/4	750	1,63			CL 80-40.1/4	550	1,27		
CL 50-110.2/4	1100	2,4			CL 80-40.2/4	750	1,63		
CL 50-100/4	750	1,63			CL 100-140.1/4	3000	6,17		
CL 50-90/4	550	1,27			CL 100-140.2/4	4000	8,11		
CL 50-80/4	1100	2,4			CL 100-130.1/4	2200	4,64		
CL 50-70/4	550	1,27			CL 100-130.2/4	3000	6,17		
CL 50-50/4	550	1,27			CL 100-110/4	2200	4,64		
CL 65-150/4	2200	4,64			CL 100-90/4	3000	6,17		
CL 65-120/4	1500	3,26			CL 125-250/4W	5500	11		
CL 65-90.1/4	750	1,63			CL 125-250/4Z	5500	11		
CL 65-90.2/4	1100	2,4			CL 125-250/4Y	7500	15		
CL 65-70/4	750	1,63			CL 125-250/4X	9200	19		
CL 65-50/4	550	1,27			CL 150-250/4W	7500	15		
CL 80-140.1/4	2200	4,64			CL 150-250/4V	9200	19		
CL 80-140.2/4	3000	6,17			CL 150-250/4Z	11000	22		
CL 80-120/4	2200	4,64			CL 150-250/4Y	15000	30		
CL 80-110/4	2200	4,64			CL 150-250/4X	15000	30		

## CL 2P


### Dati Tecnici 2 Poli – 3000 rpm

MODELLO	Pot. (W)	In (A)	V	Classe isolamento	MODELLO	Pot. (W)	In (A)	V	Classe isolamento
CL 401 - 2	5500	10,6	3 ~ 400 V	F	CL 50-160/2B	3000	6	3 ~ 400 V	F
CL 402 - 2	4000	7,72			CL 50-160/2A	4000	8		
CL 403 - 2	3000	5,92			CL 50-200/2C	5500	11		
CL 501 - 2	11000	20,4			CL 50-200/2B	6300	13		
CL 502 - 2	5500	10,6			CL 50-200/2A	7500	15		
CL 503 - 2	3000	5,92			CL 65-125/2C	2000	4		
CL 651 - 2	15000	27,6			CL 65-125/2B	3000	6		
CL 652 - 2	7500	14,1			CL 65-125/2A	4000	8		
CL 653 - 2	5500	10,6			CL 65-160/2B	5500	11		
CL 801 - 2	22000	39,1			CL 65-160/2A	7500	15		
CL 802 - 2	18500	33,7			CL 65-200/2B	10000	20		
CL 803 - 2	7500	14,1			CL 65-200/2A	12500	25		
CL 32-100/2A	370	0,8			CL 80-160/2C	10000	20		
CL 40-100/2B	550	1,1			CL 80-160/2B	12500	25		
CL 40-100/2A	750	1,5			CL 80-160/2A	15000	30		
CL 40-125/2C	750	1,5			CL 80-200/2D	15000	30		
CL 40-125/2B	1000	2			CL 80-200/2C	18500	37		
CL 40-125/2A	1500	3			CL 80-200/2B	22000	44		
CL 40-160/2C	2000	4			CL 100-160/2D	10000	20		
CL 40-160/2B	3000	6			CL 100-160/2C	12500	25		
CL 40-160/2A	3000	6			CL 100-160/2B	15000	30		
CL 40-200/2C	4000	8			CL 100-200/2D	18500	37		
CL 40-200/2B	5500	11			CL 100-200/2C	22000	44		
CL 40-200/2A	6300	13			CL 100-200/2B	30000	60		
CL 50-125/2C	1500	3			CL 100-200/2A	37000	74		
CL 50-125/2B	2000	4			CL 100-250/2D	37000	74		
CL 50-125/2A	3000	6			CL 50-160/2B	18500	37		

Elettropompe singole in linea standard  
 Single standard In-line electric pumps  
 4 Poli

## CL 4P

Dimensioni (mm)

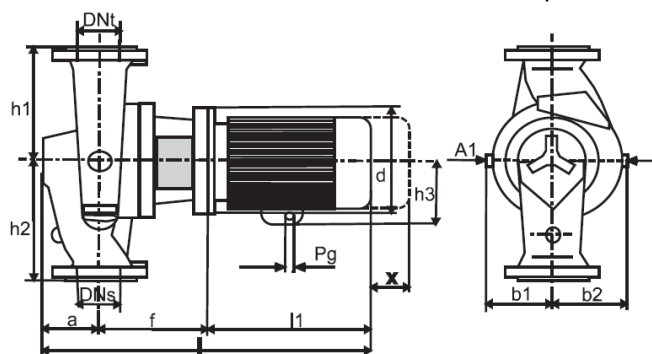

MODELLO	L (mm)	DN	a/B	f	b1/E	b2/F	h1/l	h2/H	d	h3	l1/C	Pg	l	x
CL 40-140/4	390	40	90	163	145	135	190	200	200	138	249	16	502	100
CL 40-110/4	390	40	90	163	145	135	190	200	200	138	249	13,5	487	100
CL 40-90/4	360	40	90	155	133	127	180	180	200	130	234	13,5	479	100
CL 40-60/4	340	40	90	155	113	106	160	180	200	130	234	13,5	479	100
CL 50-140.1/4	425	50	96	159	150	135	205	220	200	138	274	16	512	100
CL 50-140.2/4	425	50	96	159	150	135	205	220	200	138	274	16	527	100
CL 50-120.1/4	425	50	96	159	150	135	205	220	200	138	274	13,5	489	100
CL 50-120.2/4	425	50	96	159	150	135	205	220	200	138	274	16	512	100
CL 50-110.1/4	425	50	96	159	150	135	205	220	200	138	274	13,5	489	100
CL 50-110.2/4	425	50	96	159	150	135	205	220	200	138	274	16	512	100
CL 50-100/4	425	50	96	159	150	135	205	220	200	138	274	13,5	489	100
CL 50-90/4	425	50	96	159	150	135	205	220	200	138	274	13,5	489	100
CL 50-80/4	380	50	96	159	138	126	180	200	200	138	249	16	512	100
CL 50-70/4	380	50	96	159	138	126	180	200	200	138	249	13,5	489	100
CL 50-50/4	340	50	96	159	240	107	160	180	200	130	234	13,5	489	100
CL 65-150/4	480	65	95	164	160	140	225	255	250	147	307	16	569	110
CL 65-120/4	480	65	95	164	160	140	225	255	250	147	307	16	531	110
CL 65-90.1/4	420	65	95	164	138	125	200	220	200	138	249	13,5	493	110
CL 65-90.2/4	420	65	95	164	138	125	200	220	200	138	249	16	516	110
CL 65-70/4	420	65	95	164	138	125	200	220	200	138	249	13,5	493	110
CL 65-50/4	390	65	95	164	135	110	180	210	200	130	234	13,5	493	110
CL 80-140.1/4	530	80	103	168	183	148	245	285	250	147	307	16	581	120
CL 80-140.2/4	530	80	103	168	183	148	245	285	250	147	307	16	581	120
CL 80-120/4	530	80	103	168	183	148	245	285	250	147	307	16	581	120
CL 80-110/4	530	80	103	168	183	148	245	285	250	147	307	16	581	120
CL 80-100.1/4	530	80	103	168	183	148	245	285	250	147	307	16	543	120
CL 80-100.2/4	530	80	103	168	183	148	245	285	250	147	307	16	581	120
CL 80-90/4	480	80	103	168	172	138	220	260	250	157	310	16	581	120
CL 80-80.1/4	480	80	103	168	172	138	220	260	250	147	307	16	543	120
CL 80-80.2/4	480	80	103	168	172	138	220	260	250	147	307	16	581	120
CL 80-60.1/4	440	80	103	168	158	124	200	240	200	138	249	13,5	505	120
CL 80-60.2/4	440	80	103	168	158	124	200	240	200	138	249	16	528	120
CL 80-60.3/4	440	80	103	168	185	124	200	240	200	121	272	16	543	120
CL 80-40.1/4	440	80	103	168	158	124	200	240	200	138	249	13,5	505	120
CL 80-40.2/4	440	80	103	168	158	124	200	240	200	138	249	13,5	505	120
CL 100-140.1/4	560	100	113	169	187	152	270	290	250	162	320	16	592	125
CL 100-140.2/4	560	100	113	169	187	152	270	290	250	162	320	16	602	125
CL 100-130.1/4	560	100	113	169	187	152	270	290	250	162	320	16	592	125
CL 100-130.2/4	560	100	113	169	187	152	270	290	250	162	320	16	592	125
CL 100-110/4	560	100	113	169	187	152	270	290	250	162	320	16	592	125
CL 100-90/4	520	100	113	169	180	140	245	275	250	147	307	16	592	125
CL 125-250/4W	620	125	195		195	195	280	340			550			
CL 125-250/4Z	620	125	195		195	195	280	340			550			
CL 125-250/4Y	620	125	195		195	195	280	340			550			
CL 125-250/4X	620	125	195		195	195	280	340			550			
CL 150-250/4W	700	150	220		210	210	330	370			555			
CL 150-250/4V	700	150	220		210	210	330	370			555			
CL 150-250/4Z	700	150	220		210	210	330	370			555			
CL 150-250/4Y	700	150	220		210	210	330	370			755			
CL 150-250/4X	700	150	220		210	210	330	370			755			


Elettropompe singole in linea standard

Single standard In-line electric pumps

2 Poli

**CL 2P**

Dimensioni (mm)

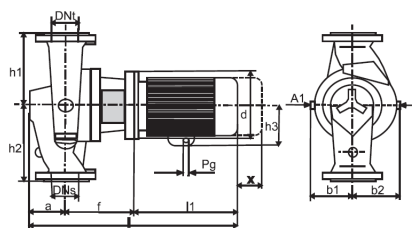






MODELLO	L (mm)	DN	a/B	f	b1/E	b2/F	h1/l	h2/H	d	h3	l1/C	Pg	l	x
CL 401 - 2	390	40	90	188	145	135	190	200	300	200	361	21	639	100
CL 402 - 2	360	40	90	155	133	127	180	180	250	162	314	16	559	100
CL 403 - 2	340	40	90	155	113	106	160	180	250	147	314	16	559	100
CL 501 - 2	425	50	96	214	150	135	205	220	350	236	479	29	789	100
CL 502 - 2	380	50	96	184	138	126	180	200	300	200	361	21	641	100
CL 503 - 2	340	50	96	159	124	107	160	180	250	147	314	16	569	100
CL 651 - 2	480	65	95	219	160	140	225	255	350	236	521	29	835	110
CL 652 - 2	420	65	95	189	138	125	200	220	300	200	361	21	611	110
CL 653 - 2	390	65	95	189	135	110	180	210	300	200	361	21	611	110
CL 801 - 2	530	80	103	223	183	148	245	285	350	235	550	29	876	120
CL 802 - 2	480	80	103	223	172	138	225	255	350	236	521	29	847	120
CL 803 - 2	440	80	103	193	158	124	200	240	300	200	357	21	653	120
CL 32-100/2A	220	65	65		65	107	110	110			330			
CL 40-100/2B	240	65	75		77	107	110	130			330			
CL 40-100/2A	240	65	75		77	107	110	130			330			
CL 40-125/2C	300	65	100		93	107	140	160			325			
CL 40-125/2B	300	65	100		93	118	140	160			345			
CL 40-125/2A	300	65	100		93	118	140	160			345			
CL 40-160/2C	320	80	100		108	149	150	170			385			
CL 40-160/2B	320	80	100		108	149	150	170			385			
CL 40-160/2A	320	80	100		108	149	150	170			385			
CL 40-200/2C	380	80	100		127	159	180	200			425			
CL 40-200/2B	380	80	100		127	159	180	200			425			
CL 40-200/2A	380	80	100		127	159	180	200			425			
CL 50-125/2C	320	80	110		103	118	140	180			345			
CL 50-125/2B	320	80	110		103	118	140	180			345			
CL 50-125/2A	320	80	110		103	118	140	180			385			
CL 50-160/2B	340	80	110		113	149	160	180			385			
CL 50-160/2A	340	80	110		113	149	160	180			385			
CL 50-200/2C	400	80	110		131	159	180	220			435			
CL 50-200/2B	400	100	110		131	159	180	220			435			
CL 50-200/2A	400	100	110		131	184	180	220			540			
CL 65-125/2C	360	100	140		108	149	155	205			385			
CL 65-125/2B	360	100	140		108	149	155	205			385			
CL 65-125/2A	360	100	140		108	159	155	205			425			
CL 65-160/2B	400	100	140		122	159	180	220			435			
CL 65-160/2A	400	125	140		122	184	180	220			540			
CL 65-200/2B	440	125	140		136	184	200	240			540			
CL 65-200/2A	440	125	140		136	184	200	240			540			
CL 80-160/2C	440	125	160		131	184	200	240			540			
CL 80-160/2B	440	150	160		131	184	200	240			540			
CL 80-160/2A	440	150	160		131	184	200	240			540			
CL 80-200/2D	500	150	160		146	184	225	275			540			
CL 80-200/2C	500	150	160		146	229	225	275			700			
CL 80-200/2B	500	150	160		146	229	225	275			700			
CL 100-160/2D	525	100	190		136	184	225	300			540			
CL 100-160/2C	525	100	190		136	184	225	300			540			
CL 100-160/2B	525	100	190		136	184	225	300			540			
CL 100-200/2D	550	100	190		156	230	250	300			700			
CL 100-200/2C	550	100	190		156	257	250	300			805			
CL 100-200/2B	550	100	190		156	257	250	300			805			
CL 100-200/2A	570	100	190		176	257	250	320			805			
CL 100-250/2D	580	100	190		156	230	280	300			700			

**Elettropompe gemellari in linea standard**  
**Double standard In-line electric pumps**

**CLD 4P**



4 Poli


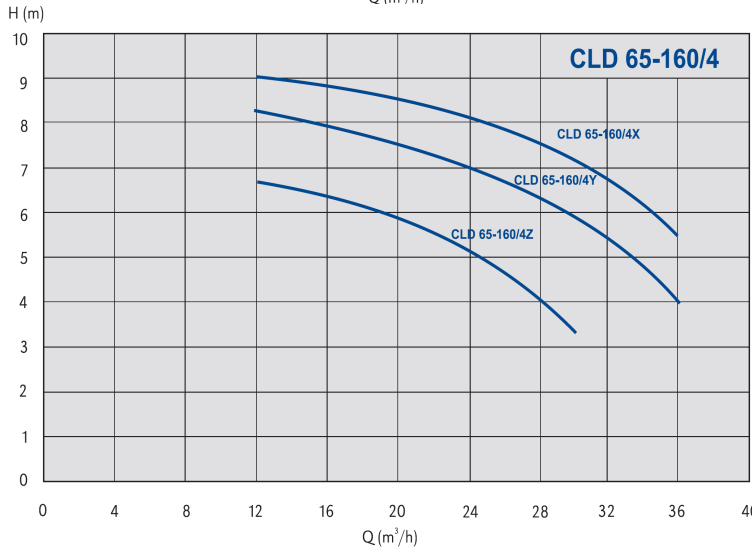
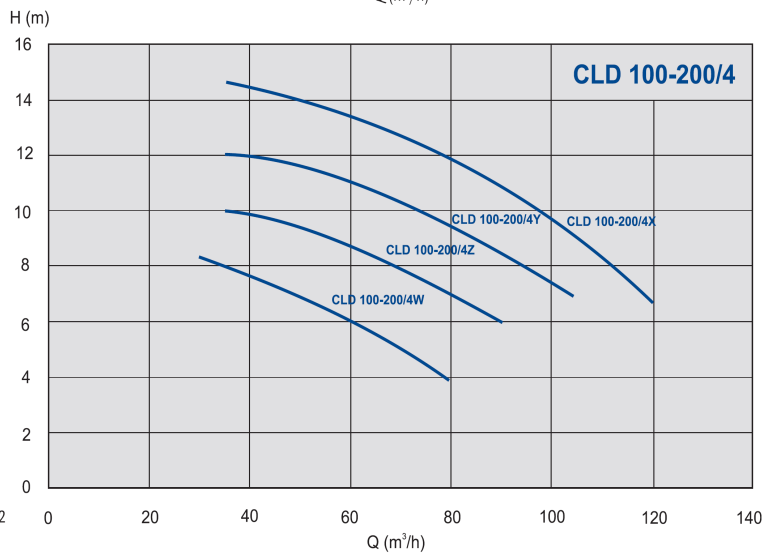
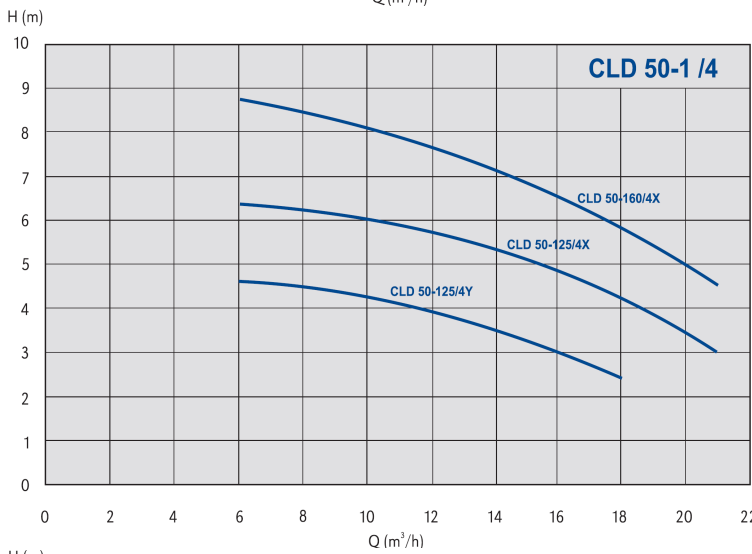
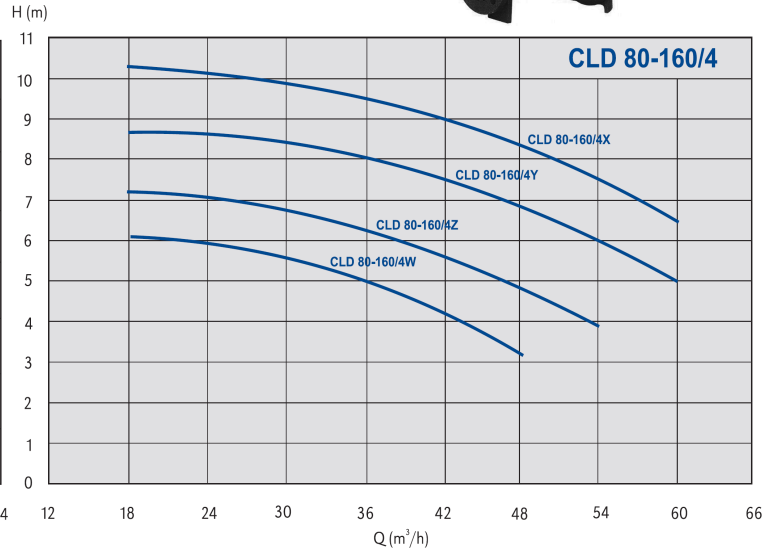
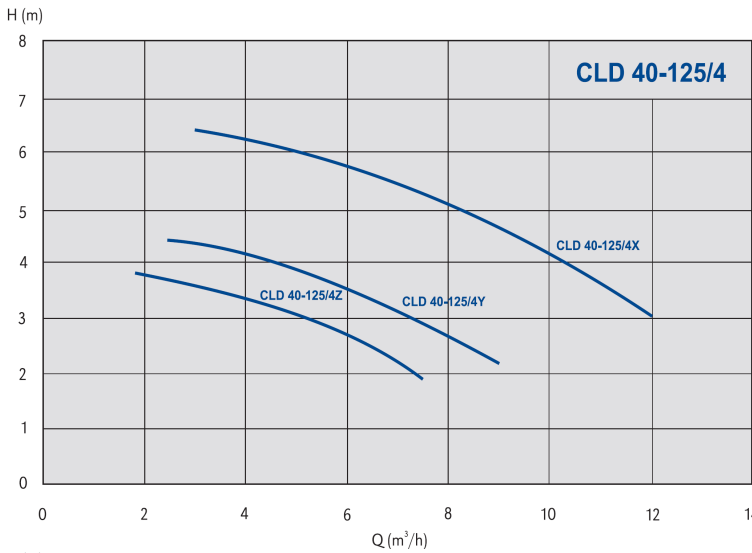


**Elettropompe gemellari in linea standard**  
**Double standard In-line electric pumps**

**CLD 2P**



2 Poli

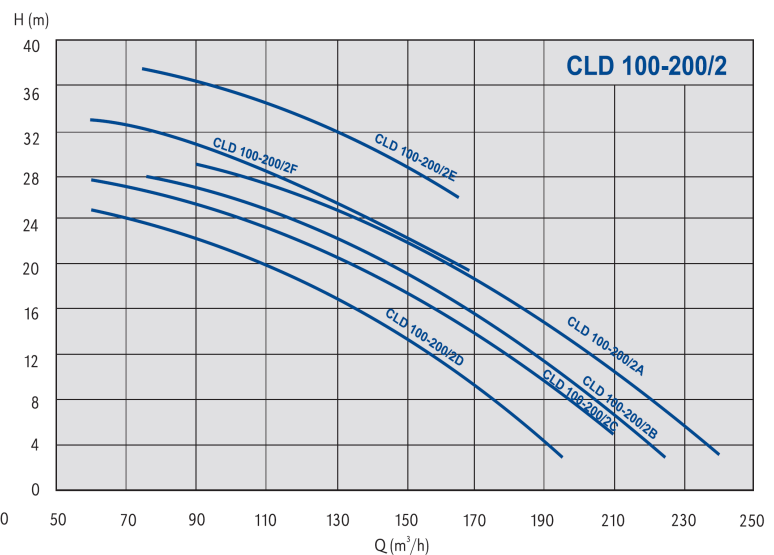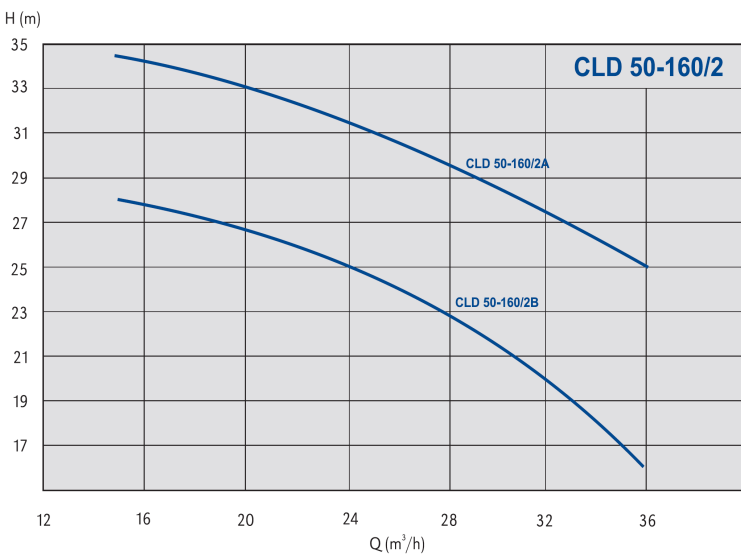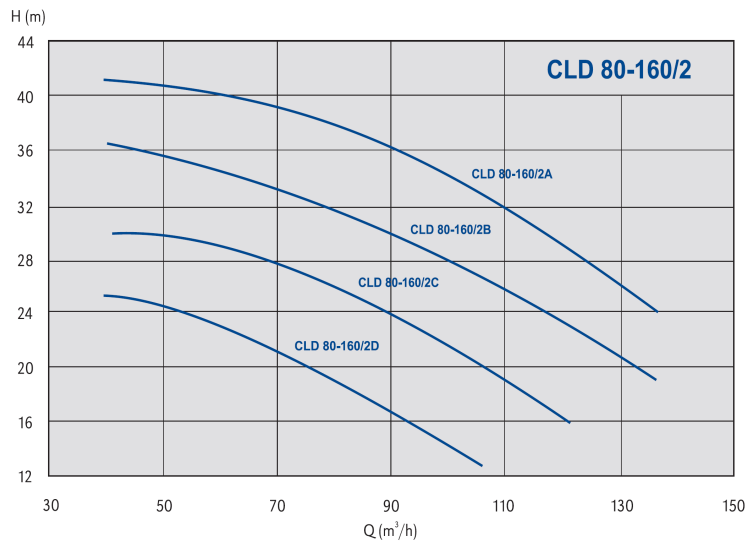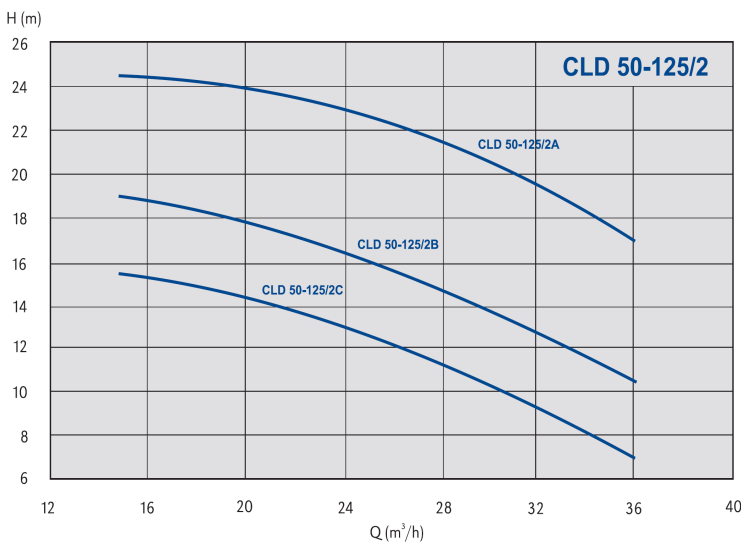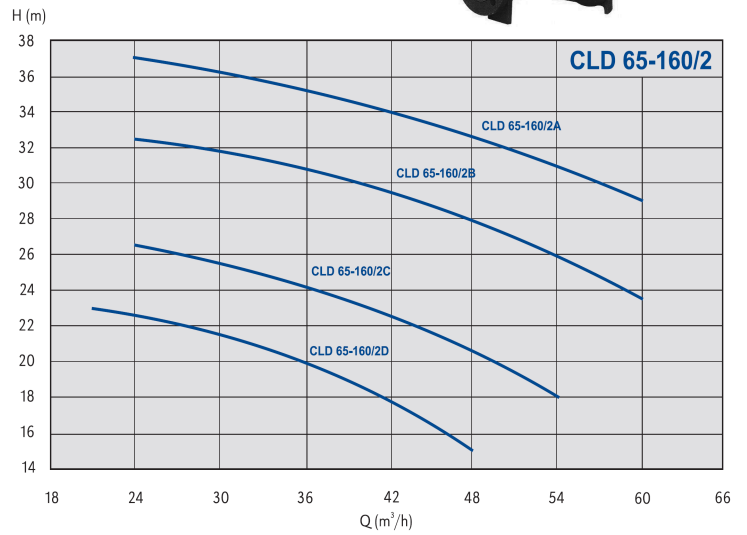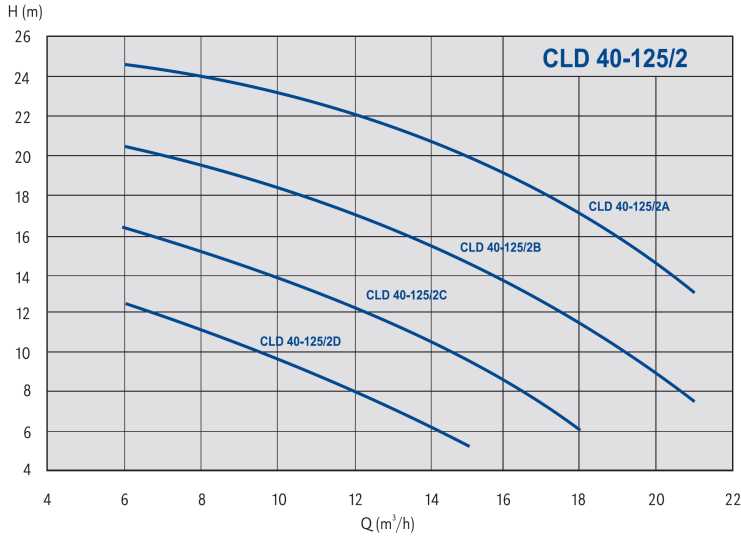

## CLD 4P

### Dati Tecnici 4 Poli – 1500 rpm

MODELLO	Pot. (W)	In (A)	V	Classe isolamento
CLD 40-125 /4Z	250	0,5	3 ~ 400 V	F
CLD 40-125 /4Y	250	0,5		
CLD 40-125 /4X	250	0,5		
CLD 50-125 /4Y	250	0,5		
CLD 50-125 /4X	370	0,8		
CLD 50-160 /4X	500	1		
CLD 65-160 /4Z	550	1,1		
CLD 65-160 /4Y	750	1,5		
CLD 65-160 /4X	900	1,8		
CLD 80-160 /4W	750	1,5		
CLD 80-160 /4Z	900	1,8		
CLD 80-160 /4Y	1100	2,2		
CLD 80-160 /4X	1500	3		
CLD 100-200 /4W	1500	3		
CLD 100-200 /4Z	2200	4,4		
CLD 100-200 /4Y	3000	6		
CLD 100-200 /4X	4000	8		

## CLD 2P

### Dati Tecnici 2 Poli – 3000 rpm


MODELLO	Pot. (W)	In (A)	V	Classe isolamento
CLD 40-125/2D	550	1,1	3 ~ 400 V	F
CLD 40-125/2C	750	1,5		
CLD 40-125/2B	1000	2		
CLD 40-125/2A	1500	3		
CLD 50-125/2C	1500	3		
CLD 50-125/2B	2000	4		
CLD 50-125/2A	3000	6		
CLD 50-160/2B	3000	6		
CLD 50-160/2A	4000	8		
CLD 65-160/2D	3000	6		
CLD 65-160/2C	4000	8		
CLD 65-160/2B	5500	11		
CLD 65-160/2A	7500	15		
CLD 80-160/2D	7500	15		
CLD 80-160/2C	10000	20		
CLD 80-160/2B	12500	25		
CLD 80-160/2A	15000	30		
CLD 100-200/2F	12500	25		
CLD 100-200/2E	15000	30		
CLD 100-200/2D	10000	20		
CLD 100-200/2C	12500	25		
CLD 100-200/2B	15000	30		
CLD 100-200/2A	15000	30		



Elettropompe gemellari in linea standard

Doble standard In-line electric pumps

2 Poli – 4 Poli

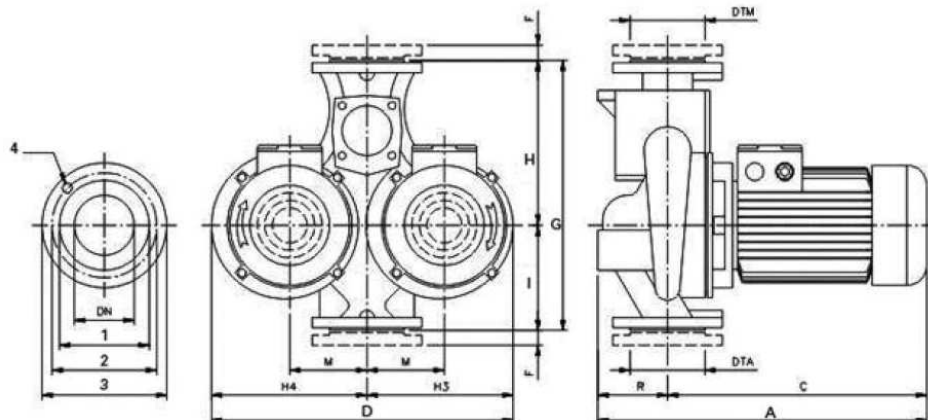

CLD 4P

CLD 2P

Dimensioni (mm)

MODELLO	DN	A	B	C	D	E	F	G	H	I	L	M
CLD 40-125 /4Z	40	425	100	345	397	200	197	340	130	210	20	100
CLD 40-125 /4Y	40	425	100	345	397	200	197	340	130	210	20	100
CLD 40-125 /4X	40	425	100	345	397	200	197	340	130	210	20	100
CLD 50-125 /4Y	50	435	110	325	427	217	210	365	145	220	22	105
CLD 50-125 /4X	50	435	110	325	427	217	210	365	145	220	22	105
CLD 50-160 /4X	50	435	110	325	480	245	235	410	170	240	22	120
CLD 65-160 /4Z	65	475	130	345	543	275	268	450	180	270	22	140
CLD 65-160 /4Y	65	475	130	345	543	275	268	450	180	270	22	140
CLD 65-160 /4X	65	475	130	345	543	275	268	450	180	270	22	140
CLD 80-160 /4W	80	485	150	385	550	280	270	510	205	305	24	135
CLD 80-160 /4Z	80	485	150	385	550	280	270	510	205	305	24	135
CLD 80-160 /4Y	80	535	150	385	550	280	270	510	205	305	24	135
CLD 80-160 /4X	80	535	150	385	550	280	270	510	205	305	24	135
CLD 100-200 /4W	100	535	180	435	670	325	345	630	240	390	26	165
CLD 100-200 /4Z	100	615	180	435	670	325	345	630	240	390	26	165
CLD 100-200 /4Y	100	615	180	435	670	325	345	630	240	390	26	165
CLD 100-200 /4X	100	615	180	435	670	325	345	630	240	390	26	165
CLD 40-125/2D	40	445	100	345	397	200	197	340	130	210	20	100
CLD 40-125/2C	40	445	100	345	397	200	197	340	130	210	20	100
CLD 40-125/2B	40	425	100	345	397	200	197	340	130	210	20	100
CLD 40-125/2A	40	425	100	345	397	200	197	340	130	210	20	100
CLD 50-125/2C	50	495	110	385	427	217	210	365	145	220	22	105
CLD 50-125/2B	50	495	110	385	427	217	210	365	145	220	22	105
CLD 50-125/2A	50	495	110	385	427	217	210	365	145	220	22	105
CLD 50-160/2B	50	495	110	385	480	245	235	410	170	240	22	120
CLD 50-160/2A	50	535	110	425	480	245	235	410	170	240	22	120
CLD 65-160/2D	65	515	130	385	543	275	268	450	180	270	22	140
CLD 65-160/2C	65	565	130	435	543	275	268	450	180	270	22	140
CLD 65-160/2B	65	565	130	435	543	275	268	450	180	270	22	140
CLD 65-160/2A	65	670	130	540	543	275	268	450	180	270	22	140
CLD 80-160/2D	80	640	150	540	550	280	270	510	205	305	24	135
CLD 80-160/2C	80	690	150	540	550	280	270	510	205	305	24	135
CLD 80-160/2B	80	690	150	540	550	280	270	510	205	305	24	135
CLD 80-160/2A	80	690	150	540	550	280	270	510	205	305	24	135
CLD 100-200/2F	100	720	180	540	670	325	345	630	240	390	26	165
CLD 100-200/2E	100	720	180	540	670	325	345	630	240	390	26	165
CLD 100-200/2D	100	720	180	540	670	325	345	630	240	390	26	165
CLD 100-200/2C	100	720	180	540	670	325	345	630	240	390	26	165
CLD 100-200/2B	100	720	180	540	670	325	345	630	240	390	26	165
CLD 100-200/2A	100	720	180	540	670	325	345	630	240	390	26	165